




Shieldex® Bremen IR

- Purpose: IR reflective and IR defusing conductive woven fabric used in military applications
- IR reduction: 80 - 90%
- Description: Silver (Ag) plated Nylon ripstop fabric.
- Raw material: Nylon ripstop fabric
- Surface Resistivity: < 0.5 Ohms / □
- RF Shielding Effectiveness: Average 60 dB from 30Mhz to 10Ghz
- Abrasion Resistance: 1,000,000 Cycles
- Temperature Range: -40°C to 100°C / -40°F to 212°F
- Total Thickness: 0.003" (0.090mm) ± 12%
- Number of Splices: 1/98 Lm nominal
- Weight: 42 g/m² ± 10%
- Roll Widths: 52" (132 cm) ± 1.5"
- Master Roll Lengths: Average 100 Lm / 109 Lyd

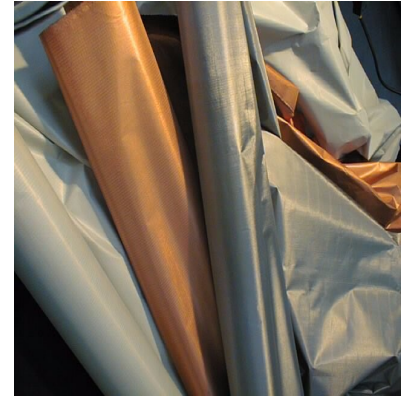

PRODUCT APPLICATION EXAMPLES

- ⇒ IR signature reducing garments
- ⇒ IR camouflage for large equipment
- ⇒ Thermal reflector
- ⇒ Tents & tarps
- ⇒ Equipment covers



Before IR Garment



After IR Garment

Accreditations:
RoHS: Compliant
Reach: Compliant
Acc. ISO 9001:2000

V Technical Textiles, Inc
4502 State Rt. 31
Palmyra, NY 14522
Phone: 315-597-1674
Fax: 315-597-6687
Web: www.vtechtextiles.com
Email: whoge@rochester.twcbc.com



V Technical Textiles Inc.
A Woman's Owned Small Business

NWBOC®
WBE CERTIFIED

NWBOC®
EDWOSB CERTIFIED

Statex Productions & Vertriebs GmbH
Kleiner Ort 11 28357
Bremen Germany
Tel: +49 421 275047/8,
Fax: +49 421 273643
info@statex.de