



Technical Textiles Inc.

PN# 1401101S80




**Shieldex® Nora Dell**

- Purpose: Very high conductive fabric for general use
- Description: Nickel, Copper, Silver (Ni/Cu/Ag) plated Nylon fabric.
- Raw material: Nylon ripstop fabric
- Surface Resistivity: < 0.009 Ohms / □
- RF Shielding Effectiveness: Average 95 dB from 300Mhz to 10Ghz
- Abrasion Resistance: 1,000,000 Cycles
- Temperature Range: -40°C to 100°C / -40°F to 212°F
- Total Thickness: 0.005" (0.125mm) ± 15%
- Number of Splices: 1/98 Lm nominal
- Weight: 100 g/m<sup>2</sup> ± 10%
- Roll Widths: 52" (132cm) ± 1.5"
- Master Roll Lengths: Average 200 Lm / 218 Lyd



**PRODUCT APPLICATION EXAMPLES**

- ⇒ RF Shielding Enclosures
- ⇒ Base material for EMI/RFI gaskets
- ⇒ Base material for EMI/RFI garments
- ⇒ Shielding material for laminated flat I/O shielding panels
- ⇒ EMI/RFI cable shielding

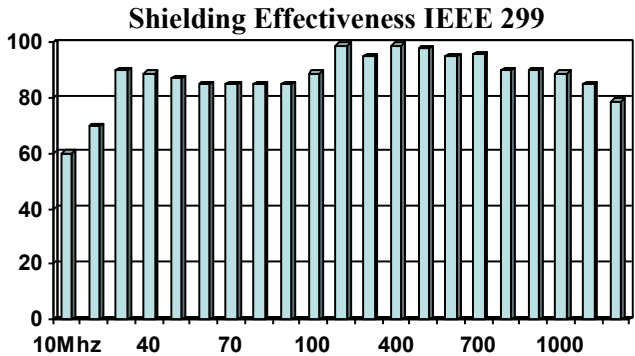

□ db

**Accreditations:**  
 RoHS: Compliant  
 Reach: Compliant  
 Acc. ISO 9001:2000



Technical Textiles Inc.

**A Woman's Owned Small Business**

V Technical Textiles, Inc  
 4502 State Rt. 31  
 Palmyra, NY 14522  
 Phone: 315-597-1674  
 Fax: 315-597-6687  
 Web: www.vtechtextiles.com  
 Email: whoge@rochester.twcbc.com

NWBOC  
 WBE CERTIFIED

NWBOC  
 EDWOSB CERTIFIED

Statex Productions & Vertriebs GmbH  
 Kleiner Ort 11 28357  
 Bremen Germany  
 Tel: +49 421 275047/8,  
 Fax: +49 421 273643  
 info@statex.de