



150030130KR




## **Shieldex® Zeven + 30 Conductive Fabric Tape Ultra Flex™**

- Purpose: Conductive fabric tape for general use
- Description: Tin, Copper (Sn/Cu) plated PBN-II® non-woven fabric with conductive adhesive
- Surface Resistivity: < 0.5 Ohms / □
- RF Shielding Effectiveness: Average 90 dB from 30Mhz to 10Ghz
- Abrasion Resistance: 1,000,000 Cycles
- Temperature Range: -30°C to 90°C / -22°F to 194°F
- Total Thickness: 0.127mm to 0.150mm (0.005—0.006")
- Weight: 0.07—0.09 kg / 0.84 m2 (2.3-3.0 oz. yds.)
- Roll Slit Widths:
  - 150030130KR13 = 1/2" (13mm)
  - 150030130KR26 = 1" (26mm)
  - 150030130KR50 = 2" (50mm)
  - 150030130KR75 = 3" (75mm)



### **PRODUCT APPLICATION EXAMPLES**

- ⇒ Base material for EMI/RFI gaskets
- ⇒ Base material for EMI/RFI garments
- ⇒ Passive static eliminator for copier, fax & printers
- ⇒ EMI/RFI cable shielding

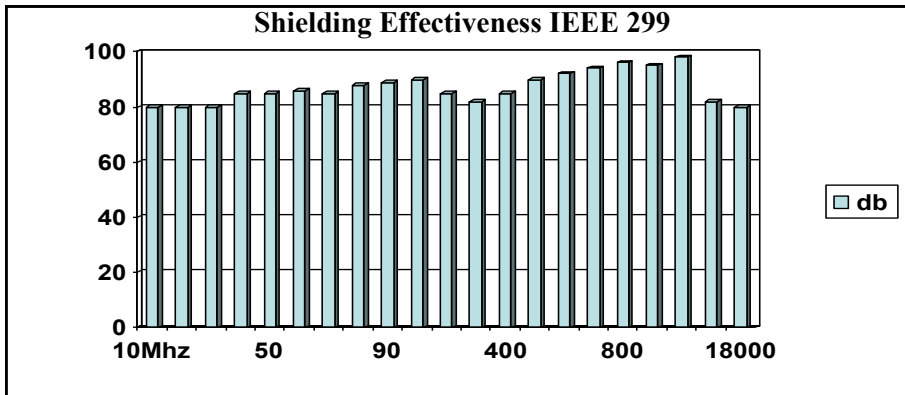

**Accreditations:**  
 RoHS: Compliant  
 Reach: Compliant  
 Acc. ISO 9001:2000



V Technical Textiles, Inc  
 4502 State Rt. 31  
 Palmyra, NY 14522  
 Phone: 315-597-1674  
 Fax: 315-597-6687  
 Web: www.vtechtextiles.com  
 Email: whoge@rochester.twcbc.com

**Technical Textiles Inc.**

**A Woman's Owned Small Business**

Statex Productions & Vertriebs GmbH  
 Kleiner Ort 11 28357  
 Bremen Germany  
 Tel: +49 421 275047/8,  
 Fax: +49 421 273643  
 info@statex.de

