




PN# 1400231125




Armor

- Purpose: Conductive woven fabric for general use.
- Description: Nickel/Copper (Ni/Cu) plated fabric with hot melt adhesive.
- Raw material: Polyester woven fabric
- Surface Resistivity: < 0.03 Ohms / □
- RF Shielding Effectiveness: Average 85 dB from 30MHz to 10GHz
- Abrasion Resistance: 1,000,000 Cycles
- Temperature Range: -40°C to 100°C / -40°F to 212°F
- Total Thickness: 0.008" (0.20mm) ± 10%
- Number of Splices: 1/100Lm nominal
- Weight: 75g/m² ± 10%
- Roll Widths: 26" ±1" (66 cm)
- Master Roll Lengths: Average 50Lm / 54 Lyd

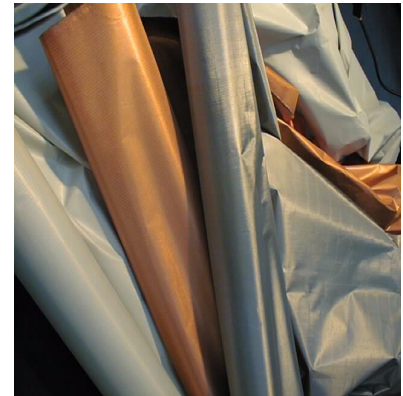

PRODUCT APPLICATION EXAMPLES

- ⇒ Base material for EMI/RFI gaskets
- ⇒ Wall covering for RF shielding
- ⇒ Shielding material for laminated flat I/O shielding panels
- ⇒ EMI/RFI cable shielding
- ⇒ RF shielding pouches

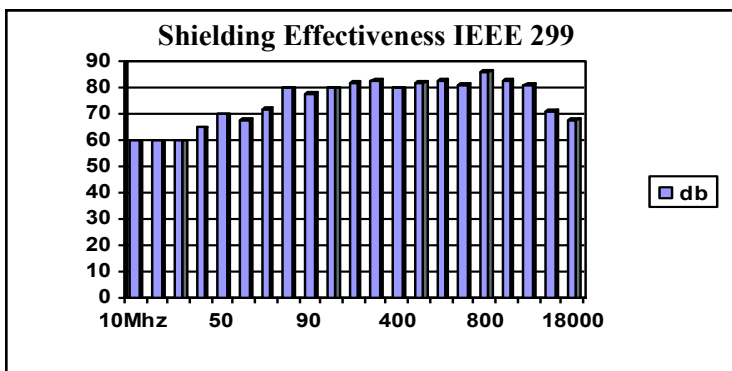

Accreditations:
 RoHS: Compliant
 Reach: Compliant
 Fire Rating: UL94V0

V Technical Textiles, Inc
 4502 State Rt. 31
 Palmyra, NY 14522
 Phone: 315-597-1674
 Fax: 315-597-6687
 Web: www.vtechtextiles.com
 Email: info@vtechtextiles.com



NWBOC® NWBOC®
 WBE CERTIFIED EDWOSB CERTIFIED

