





Armor FR Tape

- Purpose: Conductive fabric tape for general use.
- Surface Resistivity: $< 0.03 \Omega/\square$
- RF Shielding Effectiveness: Average 85 dB from 30MHz to 10GHz..
- Abrasion Resistance: 1,000,000 Cycles
- Temperature Range: -30°C to 90°C / -22°F to 194°F
- Total Thickness: 0.005-0.006" (127mm to 0.150mm)
- Weight: 0.07—0.09 kg / 0.84 m² (2.3-3.0 oz. yds.)
- Roll Slit Widths:
 - 140026100B13 = 1/2" (13mm)
 - 140026100B26 = 1" (26mm)
 - 140026100B50 = 2" (50mm)
 - 140026100B75 = 3" (75mm)

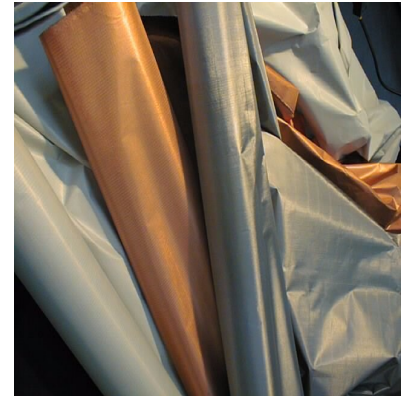

PRODUCT APPLICATION EXAMPLES

- ⇒ Base material for EMI/RFI gaskets
- ⇒ Base material for EMI/RFI garments
- ⇒ Passive static eliminator for copier, fax & printers
- ⇒ EMI/RFI cable shielding

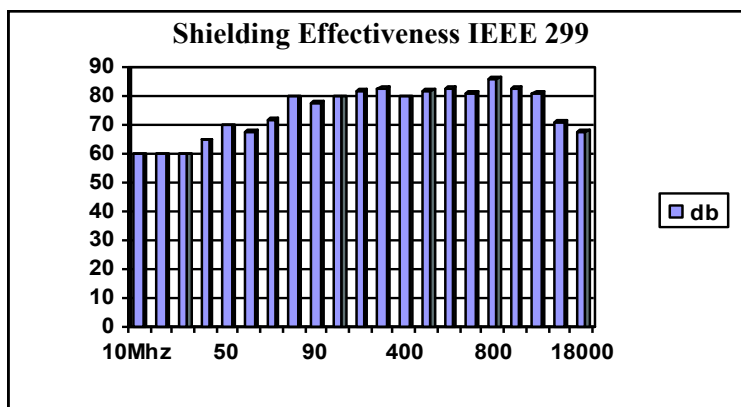

Accreditations:
RoHS: Compliant
Reach: Compliant

V Technical Textiles, Inc
4502 State Rt. 31
Palmyra, NY 14522
Phone: 315-597-1674
Fax: 315-597-6687
Web: www.vtechtextiles.com
Email: info@vtechtextiles.com



V Technical Textiles Inc.

NWBOC® NWBOC®
WBE CERTIFIED EDWOSB CERTIFIED