




1200131127LXKR



Conductive Berlin LX Fabric Tape Ultra Flex™


- Purpose: Conductive fabric tape for general use.
- Description: 2 metalized layers of plated fabric, Nickel/Copper (Ni/Cu) with conductive protective C2 (Black) coating. Polyester woven fabric with adhesive.
- Surface Resistivity: $< 0.5 \Omega/\square$
- RF Shielding Effectiveness: Average 85dB from 30MHz to 10GHz.
- Abrasion Resistance: 1,000,000 Cycles.
- Temperature Range: -30°C to 90°C / -22°F to 194°F
- Total Thickness: 0.005-0.006" (0.127mm to 0.150mm)
- Weight: $52 \text{ g/m}^2 \pm 10\%$
- Roll Slit Widths:
 - 1200131127LXKR13 = 1/2" (13mm)
 - 1200131127LXKR26 = 1" (26mm)
 - 1200131127LXKR50 = 2" (50mm)
 - 1200131127LXKR75 = 3" (75mm)

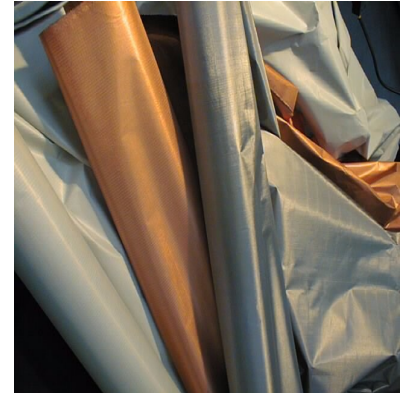

PRODUCT APPLICATION EXAMPLES

- ⇒ Base material for EMI/RFI gaskets
- ⇒ Base material for EMI/RFI garments
- ⇒ Passive static eliminator for copier, fax & printers
- ⇒ EMI/RFI cable shielding

Shielding Effectiveness IEEE 299

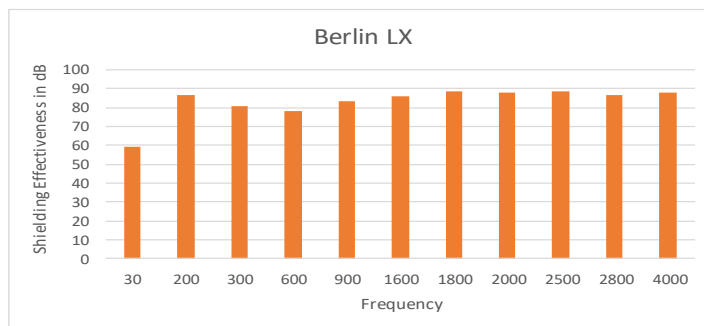

Accreditations:
 RoHS: Compliant
 Reach: Compliant

V Technical Textiles, Inc
 4502 State Rt. 31
 Palmyra, NY 14522
 Phone: 315-597-1674
 Fax: 315-597-6687
 Web: www.vtechtextiles.com
 Email: info@vtechtextiles.com



NWBOC® NWBOC®
 WBE CERTIFIED EDWOSB CERTIFIED

