




14002101130LXKR



Conductive Nora LX Fabric Tape Ultra Flex™


- Purpose: Conductive fabric tape for general use.
- Description: Nickel/Copper (Ni/Cu) woven fabric with adhesive.
- Surface Resistivity: $< 0.5 \Omega / \square$
- RF Shielding Effectiveness: Average 80 dB from 30MHz to 10GHz.
- Abrasion Resistance: 500,000 Cycles
- Temperature Range: -30°C to 90°C / -22°F to 194°F
- Total Thickness: 0.005-0.006 " (0.127mm to 0.150mm)
- Weight: $92 \text{ g/m}^2 \pm 10\%$
- Roll Slit Widths:
 - 14002101130LXKR13 = 1/2" (13mm)
 - 14002101130LXKR26 = 1" (26mm)
 - 14002101130LXKR50 = 2" (50mm)
 - 14002101130LXKR75 = 3" (75mm)

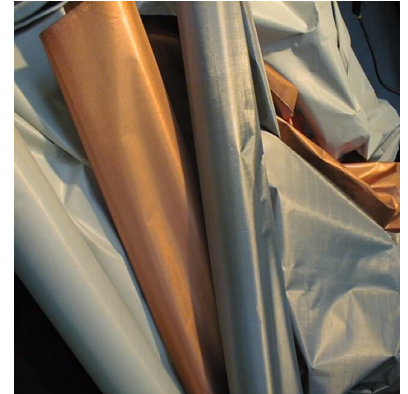

PRODUCT APPLICATION EXAMPLES

- ⇒ Base material for EMI/RFI gaskets
- ⇒ Base material for EMI/RFI garments
- ⇒ Passive static eliminator for copier, fax & printers
- ⇒ EMI/RFI cable shielding

Shielding Effectiveness IEEE 299

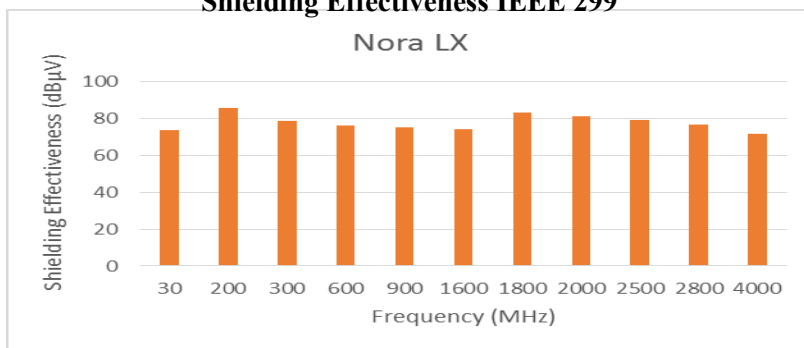

Accreditations:
RoHS: Compliant
Reach: Compliant

V Technical Textiles, Inc
4502 State Rt. 31
Palmyra, NY 14522
Phone: 315-597-1674
Fax: 315-597-6687
Web: www.vtechtextiles.com
Email: info@vtechtextiles.com



NWBOC® NWBOC®
WBE CERTIFIED EDWOSB CERTIFIED