





## Shieldex® Nora Dell-CR

- **Purpose:** Very high conductivity in a metalized nylon fabric and Clean Room Compatible. Highly resistant to galvanic corrosion. Provides extreme durability.
- **Description:** Nickel/Copper/Silver (Ni/Cu/Ag) plated Nylon fabric.
- **Raw material:** Nylon ripstop fabric
- **Surface Resistivity:** < 0.009 Ω / □
- **RF Shielding Effectiveness:** Average 95 dB from 30MHz to 10GHz
- **Abrasion Resistance:** 1,000,000 Cycles
- **Temperature Range:** -40°C to 100°C / -40°F to 212°F
- **Total Thickness:** 0.003" (0.127mm) ± 12%
- **Number of Splices:** 1/98 Lm nominal
- **Weight:** 112g/m<sup>2</sup> ± 15%
- **Roll Widths:** 52"± 1" (132cm)
- **Master Roll Lengths:** Average 200 Lm / 218 Lyd

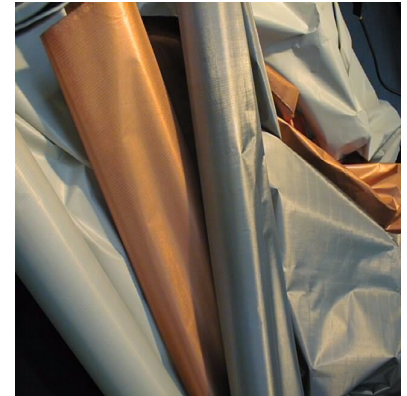

### PRODUCT APPLICATION EXAMPLES

- ⇒ Base material for EMI/RFI gaskets
- ⇒ Base material for EMI/RFI garments
- ⇒ Shielding fabric for RF tents and pouches for clean room applications
- ⇒ EMI/RFI cable shielding
- ⇒ Shielding material for laminated flat I/O shielding panels

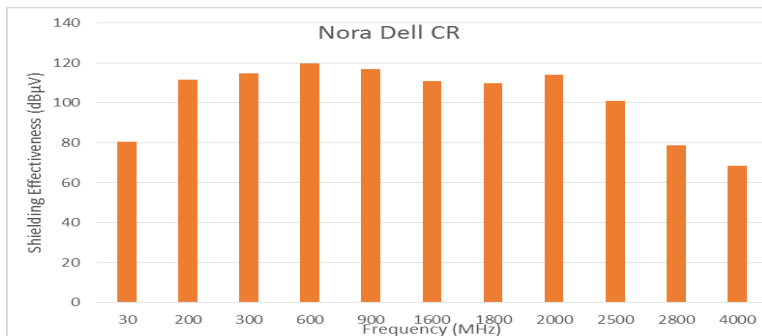

**Accreditations:**  
 RoHS: Compliant  
 Reach: Compliant  
 Acc. ISO 9001:2015

V Technical Textiles, Inc  
 4502 State Rt. 31  
 Palmyra, NY 14522  
 Phone: 315-597-1674  
 Fax: 315-597-6687  
 Web: www.vtechtextiles.com  
 Email: info@vtechtextiles.com



**NWBOC® NWBOC®**  
 WBE CERTIFIED EDWOSB CERTIFIED

Statex Produktions  
 -und Vertriebs GmbH  
 Kleiner Ort 11 28357  
 Bremen Germany  
 Tel: +49 421 27 50 47  
 Fax: +49 421 27 36 43  
 info@statex.de