




PN# 1400201130LX-RS




## Nora-LX RS

- Purpose: Conductive fabric for general use
- Description: 2 metalized layers of plated fabric, Nickel/Copper (Ni/Cu) plated polyester fabric.
- Raw material: Polyester ripstop fabric
- Surface Resistivity: < 0.05 Ohms / □
- RF Shielding Effectiveness: Average 80 dB from 30MHz to 10GHz
- Abrasion Resistance: 200,000 Cycles
- Temperature Range: -40°C to 100°C / -40°F to 212°F
- Total Thickness: 0.004" (0.102mm) ± 10%
- Number of Splices: 1/200Lm nominal
- Weight: 80g/m<sup>2</sup> ± 10%
- Roll Widths: 53"± 1" (135cm)
- Master Roll Lengths: Average 200 Lm / 218Lyd

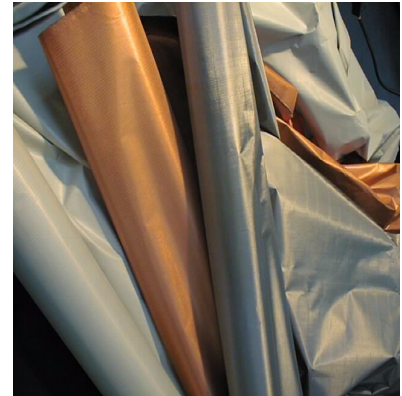

### PRODUCT APPLICATION EXAMPLES

- ⇒ Base material for EMI/RFI gaskets
- ⇒ Base material for EMI/RFI garments
- ⇒ Shielding material for laminated flat I/O shielding panels
- ⇒ EMI/RFI cable shielding
- ⇒ Wall covering for RF Shielding

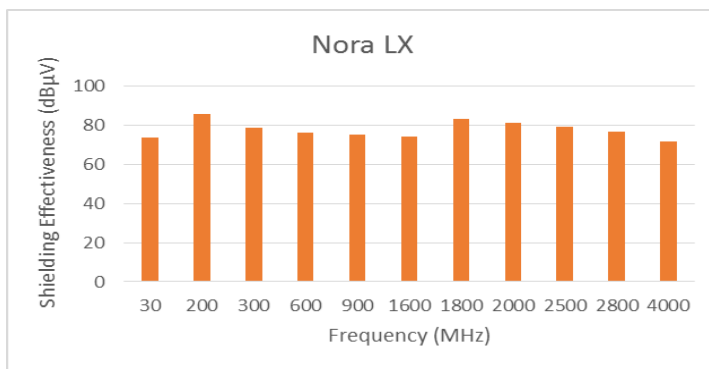

**Accreditations:**  
 RoHS: Compliant  
 Reach: Compliant  
 Acc. ISO 9001:2015

V Technical Textiles, Inc  
 4502 State Rt. 31  
 Palmyra, NY 14522  
 Phone: 315-597-1674  
 Fax: 315-597-6687  
 Web: www.vtechtextiles.com  
 Email: info@vtechtextiles.com



**NWBOC® NWBOC®**  
 WBE CERTIFIED EDWOSB CERTIFIED

