



Shieldex® Nora-RS


- Purpose: Conductive woven fabric for general use.
- Description: Nickel/Copper/Silver (Ni/Cu/Ag) plated Nylon fabric.
- Raw material: Nylon ripstop fabric
- Surface Resistivity: < 0.03 Ohms / □
- RF Shielding Effectiveness: Average 85 dB from 30MHz to 10GHz
- Abrasion Resistance: 1,000,000 Cycles
- Temperature Range: -40°C to 100°C / -40°F to 212°F
- Total Thickness: 0.004" (0.110mm) ± 12%
- Number of Splices: 1/100Lm nominal
- Weight: 83 g/m² ± 12%
- Roll Widths: 52" ± 1" (132cm)
- Master Roll Lengths: Average 200 Lm / 218 Lyd



PRODUCT APPLICATION EXAMPLES

- ⇒ Outside Skin for fabric over foam for EMI/RFI gaskets
- ⇒ Base material for EMI/RFI garments
- ⇒ Shielding material for laminated flat I/O shielding panels
- ⇒ EMI/RFI cable shielding

Shielding Effectiveness IEEE 299

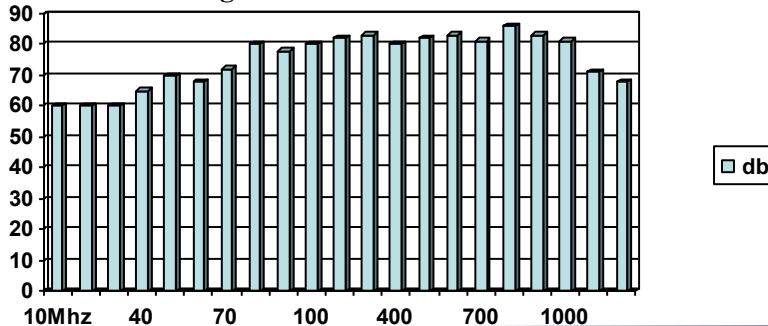

Accreditations:
 RoHS: Compliant
 Reach: Compliant
 Acc. ISO 9001:2015

V Technical Textiles, Inc
 4502 State Rt. 31
 Palmyra, NY 14522
 Phone: 315-597-1674
 Fax: 315-597-6687
 Web: www.vtechtextiles.com
 Email: info@vtechtextiles.com



NWBOC® NWBOC®
 WBE CERTIFIED EDWOSB CERTIFIED

Statex Produktions
 -und Vertriebs GmbH
 Kleiner Ort 11 28357
 Bremen Germany
 Tel: +49 421 27 50 47
 Fax: +49 421 27 36 43
 info@statex.de