



PN# 1101201111(110cm)




### Shieldex® Tulle

- Purpose: Conductive knitted fabric for general use. Antibacterial, Anti-odor, and Fungicidal. Excellent thermal conductivity.
- Description: Silver (Ag) plated knitted Nylon fabric
- Plating: 99% pure silver
- Surface Resistivity: < 1.4 Ohms / □
- RF Shielding Effectiveness: Average 42 dB from 30MHz to 10GHz
- Temperature Range: -40°C to 100°C / -40°F to 212°F
- Total Thickness: 0.009" (0.22mm) ± 10%
- Abrasion Resistance: 10,000 cycles
- Weight: 33 g/m<sup>2</sup> ± 15 g/m<sup>2</sup>
- Roll Widths: 43" ±1" (110cm)
- Master Roll Lengths: Average 100 Lm / approx. 109 Lyd



#### PRODUCT APPLICATION EXAMPLES

- ⇒ Base material for medical garments
- ⇒ Wound dressing
- ⇒ EMI/RFI shielding
- ⇒ Automotive
- ⇒ Aerospace
- ⇒ Transparent base material for front and back projection theatre cycloramas. Tulle bobbinet is easy to sew and does not ravel under normal conditions

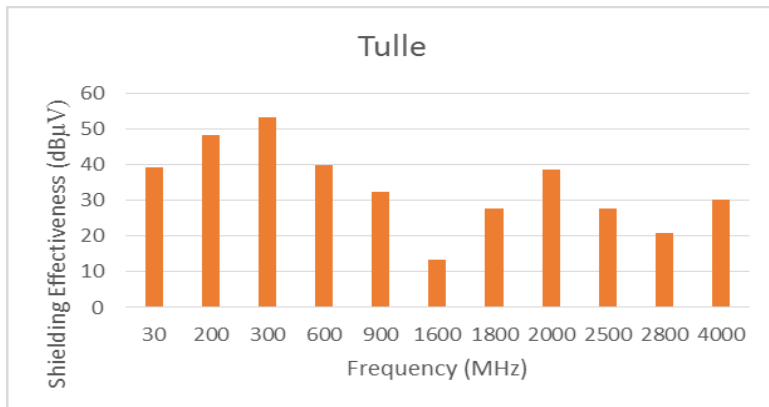

**Accreditations:**  
 RoHS: Compliant  
 Reach: Compliant  
 Acc. ISO 9001:2015

V Technical Textiles, Inc  
 4502 State Rt. 31  
 Palmyra, NY 14522  
 Phone: 315-597-1674  
 Fax: 315-597-6687  
 Web: www.vtechtextiles.com  
 Email: info@vtechtextiles.com



Technical Textiles Inc.

**NWBOC® NWBOC®**  
 WBE CERTIFIED EDWOSB CERTIFIED

Statex Produktions  
 -und Vertriebs GmbH  
 Kleiner Ort 11 28357  
 Bremen Germany  
 Tel: +49 421 27 50 47  
 Fax: +49 421 27 36 43  
 info@statex.de

