




PN# 150030130




Shieldex® Zeven + 30

- Purpose: Conductive non-woven fabric for general use.
- Description: Tin, Copper (Sn/Cu) plated non-woven fabric (PBN-II®) + protective coating.
- Raw material: PBN-II® non-woven fabric.
- Surface Resistivity: < 0.05 Ohms / □
- RF Shielding Effectiveness: Average 90 dB from 300MHz to 10GHz..
- Temperature Range: -40°C to 100°C / -40°F to 212°F
- Total Thickness: 0.013" (0.32mm) ± 20%
- Number of Splices: 1/100M nominal
- Weight: 105 g/m² ± 20%
- Roll Widths: 39" ± 1" (100 cm)
- Master Roll Lengths: Average 250 Lm / 270 Lyd

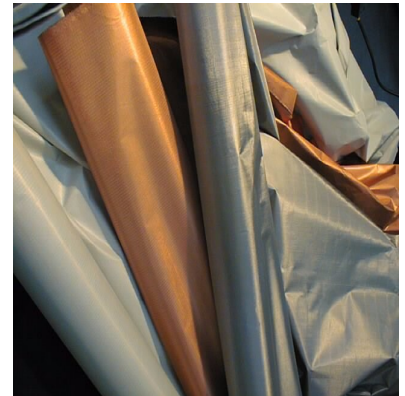

PRODUCT APPLICATION EXAMPLES

- ⇒ Base material for EMI/RFI gaskets
- ⇒ Base material for EMI/RFI garments
- ⇒ Passive static eliminator for copier, fax & printers
- ⇒ EMI/RFI cable shielding
- ⇒ Conductive fabric tape
- ⇒ RF Wallpaper

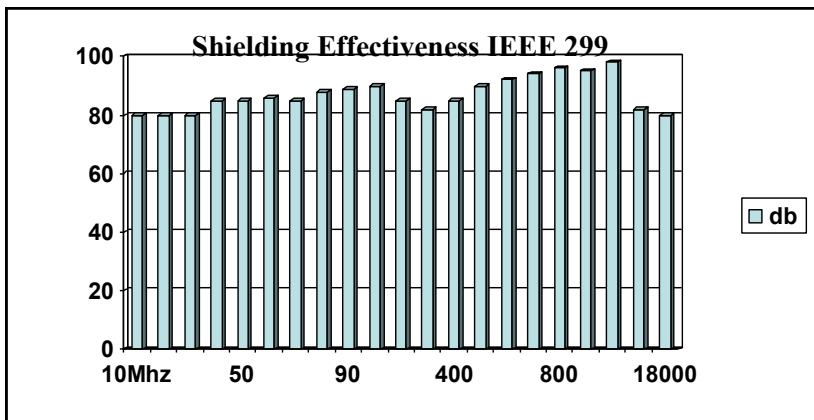

Accreditations:
 RoHS: Compliant
 Reach: Compliant
 Acc. ISO 9001:2015

V Technical Textiles, Inc
 4502 State Rt. 31
 Palmyra, NY 14522
 Phone: 315-597-1674
 Fax: 315-597-6687
 Web: www.vtechtextiles.com
 Email: info@vtechtextiles.com



NWBOC® NWBOC®
 WBE CERTIFIED EDWOSB CERTIFIED

Statex Produktions
 -und Vertriebs GmbH
 Kleiner Ort 11 28357
 Bremen Germany
 Tel: +49 421 27 50 47
 Fax: +49 421 27 36 43
 info@statex.de

