




150030130KR




Shieldex® Zeven + 30 Conductive Fabric Tape Ultra Flex™

- Purpose: Conductive fabric tape for general use.
- Description: Tin, Copper (Sn/Cu) plated PBN-II® non-woven fabric with conductive adhesive.
- Surface Resistivity: < 0.5 Ohms / □
- RF Shielding Effectiveness: Average 90 dB from 30MHz to 10GHz.
- Abrasion Resistance: 1,000,000 Cycles
- Temperature Range: -30°C to 90°C / -22°F to 194°F
- Total Thickness: 0.127mm to 0.150mm (0.005—0.006")
- Weight: 0.07—0.09 kg / 0.84 m2 (2.3-3.0 oz. yds.)
- Roll Slit Widths:
 - 150030130KR13 = 1/2" (13mm)
 - 150030130KR26 = 1" (26mm)
 - 150030130KR50 = 2" (50mm)
 - 150030130KR75 = 3" (75mm)

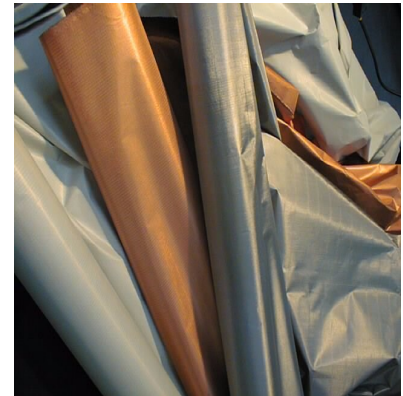

PRODUCT APPLICATION EXAMPLES

- ⇒ Base material for EMI/RFI gaskets
- ⇒ Base material for EMI/RFI garments
- ⇒ Passive static eliminator for copier, fax & printers
- ⇒ EMI/RFI cable shielding

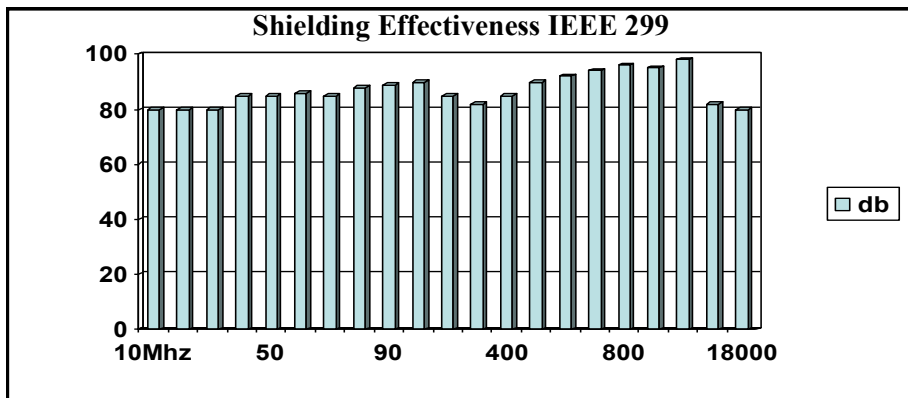

Accreditations:
 RoHS: Compliant
 Reach: Compliant
 Acc. ISO 9001:2015

V Technical Textiles, Inc
 4502 State Rt. 31
 Palmyra, NY 14522
 Phone: 315-597-1674
 Fax: 315-597-6687
 Web: www.vtechtextiles.com
 Email: info@vtechtextiles.com



Statex Produktions
 -und Vertriebs GmbH
 Kleiner Ort 11 28357
 Bremen Germany
 Tel: +49 421 27 50 47
 Fax: +49 421 27 36 43
 info@statex.de

