



PN# 110010180RS




## Shieldex® Bremen-RS

- Purpose: Conductive fabric for general use.
- Description: Silver (Ag) plated Nylon fabric. Extreme high flexibility.
- Raw material: Nylon ripstop fabric
- Surface Resistivity: < 0.3 Ohms / □
- RF Shielding Effectiveness: Average 60 dB from 30MHz to 10GHz
- Abrasion Resistance: 1,000,000 Cycles
- Temperature Range: -40°C to 100°C / -40°F to 212°F
- Total Thickness: 0.003" (0.090mm) ± 12%
- Number of Splices: 1/98 Lm nominal
- Weight: 43 g/m<sup>2</sup> ± 10%
- Roll Widths: 52" ± 1" (132cm)
- Master Roll Lengths: Average 100 Lm / 109 Lyd



### PRODUCT APPLICATION EXAMPLES

- ⇒ Base material for EMI/RFI gaskets
- ⇒ Base material for EMI/RFI garments
- ⇒ Passive static eliminator for copier, fax & printers
- ⇒ EMI/RFI cable shielding
- ⇒ Medical clothes
- ⇒ Wound dressing
- ⇒ RF shielded enclosure

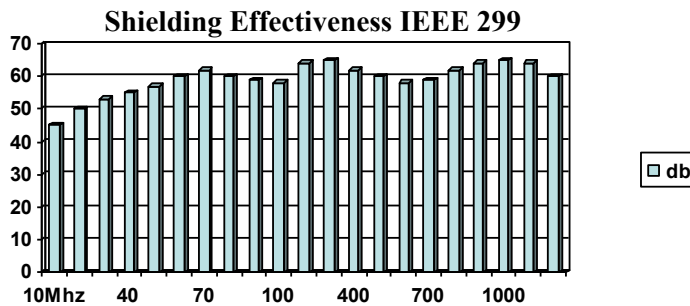

**Accreditations:**  
**RoHS: Compliant**  
**Reach: Compliant**  
**Acc. ISO 9001:2015**

**Physical Address**  
 V Technical Textiles, Inc  
 320 South Main Street  
 Newark, NY 14513  
 Phone: (315)-597-1674  
 Fax: (315)-597-6687



**Mailing Address**  
 V Technical Textiles, Inc  
 4502 State Rt. 31  
 Palmyra, NY 14522



www.vtechtextiles.com  
 info@vtechtextiles.com



**Statex Produktions -und Vertriebs GmbH**  
 Kleiner Ort 11 28357 Bremen Germany  
 Tel: +49 421 27 50 47  
 Fax: +49 421 27 36 43  
 info@statex.de