





Shieldex® Nanking RS

- Purpose: Conductive woven fabric for RF Shielding and general use.
- Description: Nickel/Silver (Ni/Ag) plated Nylon fabric. Extremely high flexibility.
- Raw material: Nylon ripstop fabric
- Surface Resistivity: < 0.3 Ohms / □
- RF Shielding Effectiveness: Average 70 dB from 30MHz to 10GHz
- Abrasion Resistance: 1,000,000 Cycles
- Temperature Range: -40°C to 100°C / -40°F to 212°F
- Total Thickness: 0.004" (0.102mm) ± 12%
- Number of Splices: 1/100Lm nominal
- Weight: 47 g/m² ± 12%
- Roll Widths: 52" ± 1.5" (132cm)

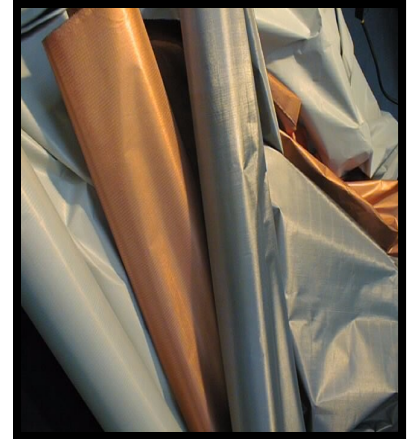

PRODUCT APPLICATION EXAMPLES

- ⇒ Outside Skin for Fabric over foam EMI/RFI gaskets
- ⇒ Base material for EMI/RFI garments
- ⇒ Shielding material for laminated flat I/O Shielding panels
- ⇒ EMI/RFI cable shielding

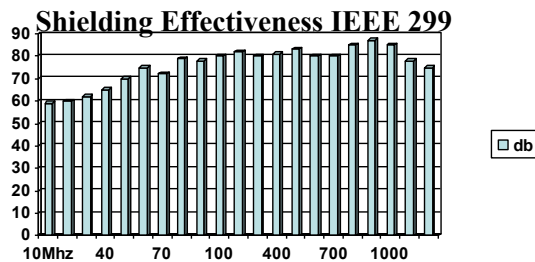

Accreditations:
 RoHS: Compliant
 Reach: Compliant
 Acc. ISO 9001:2015

Physical Address
 V Technical Textiles, Inc
 320 South Main Street
 Newark, NY 14513
 Phone: (315)-597-1674
 Fax: (315)-597-6687

Mailing Address
 V Technical Textiles, Inc
 4502 State Rt. 31
 Palmyra, NY 14522

NWBOC
 EDWOSB CERTIFIED

www.vtechtextiles.com
 info@vtechtextiles.com

NWBOC
 VVBE CERTIFIED

Statex Produktions -und Vertriebs GmbH
 Kleiner Ort 11 28357 Bremen Germany
 Tel: +49 421 27 50 47
 Fax: +49 421 27 36 43
 info@statex.de