




PN# 1401101S80



Shieldex® Nora Dell


- Purpose: Very high conductive fabric for general use.
- Description: Nickel/Copper/Silver (Ni/Cu/Ag) plated polyamide fabric (RS or PW)
- Raw material: Nylon ripstop fabric
- Surface Resistivity: $< 0.009 \Omega / \square$
- RF Shielding Effectiveness: Average 95 dB from 30 MHz to 10GHz
- Abrasion Resistance: 1,000,000 Cycles
- Temperature Range: -40°C to 100°C / -40°F to 212°F
- Total Thickness: $0.005'' (0.125\text{mm}) \pm 15\%$
- Number of Splices: 1/98 Lm nominal
- Weight: $100 \text{ g/m}^2 \pm 15\%$
- Roll Widths: $52'' \pm 1'' (132\text{cm})$
- Master Roll Lengths: Average 200 Lm / 218Lyd

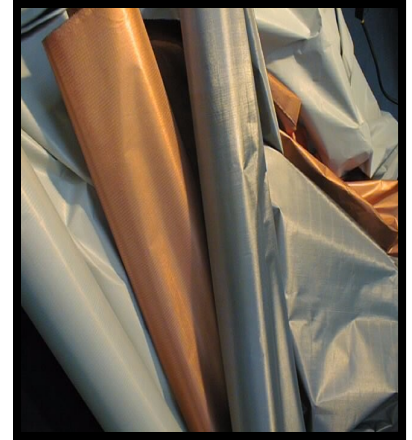

PRODUCT APPLICATION EXAMPLES

- ⇒ Base material for EMI/RFI gaskets
- ⇒ Base material for EMI/RFI garments
- ⇒ RF Shielding Enclosures
- ⇒ EMI/RFI cable shielding
- ⇒ Shielding material for laminated flat I/O shielding panels

Shielding Effectiveness IEEE 299

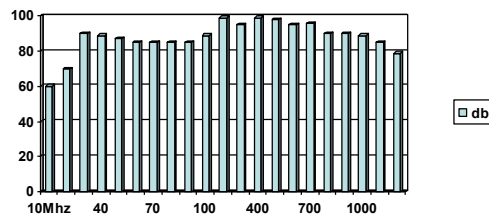

Accreditations:
 RoHS: Compliant
 Reach: Compliant
 Acc. ISO 9001:2015

Physical Address
 V Technical Textiles, Inc
 320 South Main Street
 Newark, NY 14513
 Phone: (315)-597-1674
 Fax: (315)-597-6687



Mailing Address
 V Technical Textiles, Inc
 4502 State Rt. 31
 Palmyra, NY 14522



www.vtechtextiles.com
 info@vtechtextiles.com



Statex Produktions -und Vertriebs GmbH
 Kleiner Ort 11 28357 Bremen Germany
 Tel: +49 421 27 50 47
 Fax: +49 421 27 36 43
 info@statex.de