





Nora-LX RS

- Purpose: Conductive fabric for general use
- Description: 2 metalized layers of plated fabric, Nickel/Copper (Ni/Cu) plated polyester fabric.
- Raw material: Polyester ripstop fabric
- Surface Resistivity: < 0.05 Ohms / □
- RF Shielding Effectiveness: Average 80 dB from 30MHz to 10GHz
- Abrasion Resistance: 200,000 Cycles
- Temperature Range: -40°C to 100°C / -40°F to 212°F
- Total Thickness: 0.004" (0.102mm) ± 10%
- Number of Splices: 1/200Lm nominal
- Weight: 80g/m² ± 10%
- Roll Widths: 53"± 1" (135cm)
- Master Roll Lengths: Average 200 Lm / 218Lyd

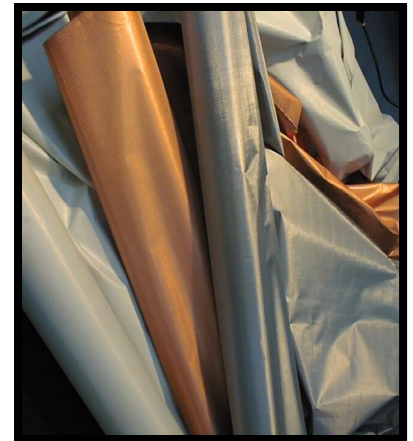

PRODUCT APPLICATION EXAMPLES

- ⇒ Base material for EMI/RFI gaskets
- ⇒ Base material for EMI/RFI garments
- ⇒ Shielding material for laminated flat I/O shielding panels
- ⇒ EMI/RFI cable shielding
- ⇒ Wall covering for RF Shielding

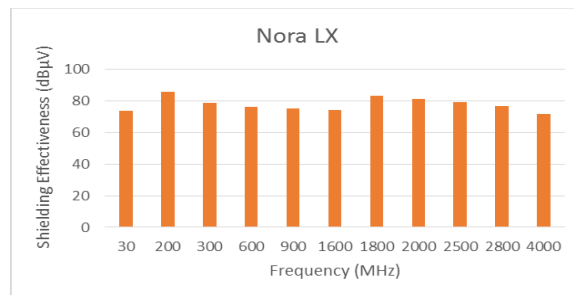

Physical Address
 V Technical Textiles, Inc
 320 South Main Street
 Newark, NY 14513
 Phone: (315)-597-1674
 Fax: (315)-597-6687



Mailing Address
 V Technical Textiles, Inc
 4502 State Rt. 31
 Palmyra, NY 14522

Technical Textiles Inc.



www.vtechtexiles.com
 info@vtechtexiles.com

