



PN# 1200231125




Shieldex® Standard

- Purpose: Conductive woven fabric for general use (waterproof).
- Description: Silver (Ag), plated fabric coated with conductive C-2 and LDPE (heat seal-thermal reversible).
- Raw material: Nylon woven fabric.
- Surface Resistivity: < 0.3 Ω/□
- RF Shielding Effectiveness: Average 60 dB from 30MHz to 10GHz.
- Abrasion Resistance: 1,000,000 Cycles
- Temperature Range: -40°C to 100°C / -40F to 212°F
- Total Thickness: 0.008" (0.20mm) ± 10%
- Number of Splices: 1/100 Lm nominal
- Weight: 85 g/m² ± 10%
- Roll Widths: 50" ± 1" (127cm)
- Master Roll Lengths: Average 100 or 200 Lm / 109 or 218 Lyd



PRODUCT APPLICATION EXAMPLES

- ⇒ Base material for EMI/RFI gaskets
- ⇒ Wall covering for RF shielding
- ⇒ Shielding material for laminated flat I/O shielding panels
- ⇒ EMI/RFI cable shielding
- ⇒ RF shielding pouches

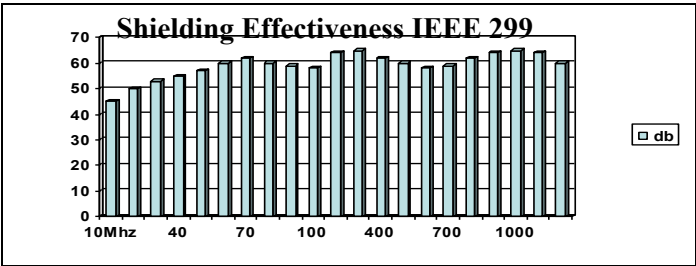

Accreditations:
 RoHS: Compliant
 Reach: Compliant
 Acc. ISO 9001:2015

Physical Address
 V Technical Textiles, Inc
 320 South Main Street
 Newark, NY 14513
 Phone: (315)-597-1674
 Fax: (315)-597-6687



Mailing Address
 V Technical Textiles, Inc
 4502 State Rt. 31
 Palmyra, NY 14522



www.vtechtextiles.com
 info@vtechtextiles.com



Statex Produktions -und Vertriebs GmbH
 Kleiner Ort 11 28357 Bremen Germany
 Tel: +49 421 27 50 47
 Fax: +49 421 27 36 43
 info@statex.de